



**SAMSUNG**

**MagicLAN**

**SWL-2300U**

**User Manual (Rev. 2.2)**

# **Table of Contents**

1. MagicLAN Installation .....	9
1.1 Introduction .....	9
1.2 Technical Background .....	9
1.3 MagicLAN Overview.....	11
2. Before the Installation.....	13
2.1 What is in your Package .....	13
2.2 System Requirement .....	13
2.3 Preparations For Installation.....	13
3. MagicLAN Installation for Windows 98SE/ME/2000/XP .....	14
3.1 Installation Overview .....	14
3.2 Installation Procedure of Windows 98SE .....	14
3.3 Installation Procedure of Windows ME .....	23
3.4 Installation Procedure of Windows 2000 .....	30
3.5 Installation Procedure of Windows XP .....	37
3.6 Update of MagicLAN Wireless LAN Card Driver.....	45
3.7 Removal of MagicLAN Wireless LAN Card Driver .....	45
4. The Program for setting MagicLAN.....	47
4.1 The concept of Profile.....	47
4.2 Installation Procedure.....	47
5. The main configuration of Program.....	53
5.1 Profile.....	54
5.1.1 The ‘New’ button.....	54
5.1.2 The ‘Apply’ button.....	54
5.1.3 The ‘Edit’ button.....	55
5.1.4 The ‘Delete’ button.....	58
5.2 Status.....	59
5.2.1 The ‘Current Status’ button.....	59
5.2.2 The ‘AP Status’ button.....	59
5.2.3 The ‘Site Survey’ button.....	60
5.2.4 Statistics.....	60
5.3 General Settings.....	60

5.3.1 The 'DHCP' button.....	60
5.3.2 The 'Options' button.....	60
5.4 Version.....	61
6. Troubleshooting .....	62

## Notice 1

---

This manual cannot be reproduced in any form without the prior written permission of SAMSUNG Electro-Mechanics Co., Ltd.

SAMSUNG Electro-Mechanics Co., Ltd. reserves the right to change this manual and the specifications to improve products without prior notice. So you can get the most recent software and user documentation for all MagicLAN products on our web site.

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

All other brand and product names are trademarks of registered trademarks of their respective holders.

<http://www.magiclan.com/>

Copyright © 1999 - 2005 SAMSUNG Electro-Mechanics Co., Ltd.  
All rights reserved.

## Notice 2

---

### **WARNING**

While installing and operating this transmitter and antenna combination the radio frequency exposure limit of  $1\text{mW}/\text{cm}^2$  may be exceeded at distances close to the antennas installed. Therefore, the user must maintain a minimum distance of 20 cm from the antenna.

### **Important Safety Information**

---

- Read these simple guidelines. Breaking the rules may be dangerous or illegal. SAMSUNG will not be responsible for any damages caused by breaking the rules.
- WLAN Card described in this document is approved for use in a wireless local area network.
- Remember to make backup copies of important data.
- When you are transferring data, keep your laptop computer stationary. Roaming between access points (APs) may break the connection.
- Only qualified service personnel must repair the equipment.
- All wireless devices may get interference, which could affect performance.
- Use approved accessories only. Do not connect incompatible products.
- Use only accessories approved by the WLAN Card manufacturer for use with this particular WLAN Card. The use of any other types will invalidate any approval or warranty applying to the WLAN Card, and may be dangerous.
- Use only the region settings appropriate for the area where the WLAN Card is used at the present time. Using the card in any other region or with an incorrect region setting is prohibited and may be illegal.
- Operation of any radio transmitting equipment, including a WLAN Card, may cause interference with the functionality of inadequately protected medical devices.
- Do not use the WLAN Card on aircraft.
- Do not use the WLAN Card at a refueling point.
- Do not use the WLAN Card near inflammable materials or chemicals.
- Do not use the WLAN Card where blasting is in progress.
- Do not use the WLAN Card when the use of wireless device may cause interference or danger.
- Do not use the WLAN Card where the use of cellular terminals is prohibited.
- Microwave oven degrades the performance of wireless LAN drastically. So do not use the WLAN card in the environment where Microwave oven is being used.



## 11Mbps High Rate 802.11b WLAN USB Adapter

### Specifications

<b>Model Name</b>	SWL-2300U
<b>System Interface</b>	USB Spec 1.1 Compliant
<b>Frequency Band</b>	2.400 ~ 2.4835GHz(Subject to local regulations)
<b>Operating Voltage</b>	5V±5% from Host PC
<b>Current Consumption</b>	Receive : 250mA (Typical), Transmit : 350mA (Typical)
	Power Save: 10mA (Typical)
<b>Data Rate</b>	1, 2, 5.5 or 11Mbps
<b>Spreading</b>	DSSS(Direct Sequence Spread Spectrum)
<b>Output Power</b>	40mW(16dBm) for 22MHz Bandwidth, 7mW/MHz
<b>Receive Sensitivity</b>	-84dBm(Typical) at 11Mbps
<b>Security</b>	40-bit/104(128)-bit WEP Encryption
<b>Antenna</b>	Dual antennas supporting Rx diversity
<b>Available Drivers</b>	Microsoft Windows 98SE/ME/2000/XP
<b>Standards</b>	IEEE 802.11b
<b>Media Access Protocol</b>	CSMA / CA (Carrier Sense Multiple Access with Collision Avoidance)
<b>Temperature Range</b>	Operating : 0~45 (32~113 ), Storage : -25~70 (-13 ~158 )
<b>Humidity</b>	10% to 90% Non-condensing
<b>Operating Range</b> (1024 bytes file transfer)	Open Space : 150m(500ft) at 11Mbps, 200m(660ft) at 2Mbps
	Closed Office: 30m(100ft) at 11Mbps, 50m(160ft) at 2Mbps *Range differs by environment
<b>Dimensions</b>	114mm×52mm×15mm & 1.2M Cable with USB A-type Connector
<b>Weight</b>	40g(Except 1.2m Cable)
<b>Certifications &amp; Regulatory Approvals</b>	Wi-Fi certified, USA(FCC), Canada(IC), Europe(CE)Korea (MIC)

Copyright Samsung Electro-Mechanics Co., Ltd. All Rights Reserved.

\*\*\*\* Table: The Operating Channels

Channel#	Frequency	FCC	Canada	ETSI	France	Spain	Japan
1	2412MHz						
2	2417MHz						
3	2422MHz						
4	2427MHz						
5	2432MHz						
6	2437MHz						
7	2442MHz						
8	2447MHz						
9	2452MHz						
10	2457MHz						
11	2462MHz						
12	2467MHz						
13	2472MHz						
14	2484MHz						

# 1. MagicLAN Installation

## 1.1 Introduction

Thank you for your purchase of SAMSUNG MagicLAN. Installing this cards allow the computer to join a wireless network based on the IEEE 802.11b (High Data Rate) WLAN standard. You will be surprised how easy for you are a part of the network with no bother of twisted cables.

## 1.2 Technical Background

- **What is IEEE 802.11?**

The IEEE 802.11 specification is a wireless LAN standard developed by the IEEE (Institute of Electrical and Electronic Engineering) committee in order to specify an *over an air* interface between a wireless client and a base station or Access Point (AP), as well as among wireless clients. Like other IEEE 802 families, IEEE 802.11 specification addresses both Physical (PHY) layer and Media Access Control (MAC) layer.

- **IEEE 802.11 Physical (PHY) Layer**

At the PHY layer, IEEE 802.11 defines three physical characteristics for WLAN: diffused infrared, direct sequence spread spectrum (DSSS), and frequency hopping spread spectrum (FHSS). While the infrared PHY operates at the baseband, the other two PHYs operate at the 2.4GHz ISM (Industrial, Scientific, and Medical) band, which can be used for operating wireless LAN devices without the need of end-user licenses. In order for wireless devices to be interoperable, they have to be conforming to the same PHY standard.


- **IEEE 802.11 Media Access Control (MAC) Layer**

The IEEE 802.11 MAC Layer is mainly concerned with the rules for accessing the wireless medium. There are two network architectures defined: Ad-hoc Network and Infrastructure Network.

- **Ad-hoc Network**


Ad-hoc Network is an architecture that supports mutual communication among wireless clients only. Since Ad-hoc Network does not support access to wired networks, it does not need an Access Point to be a part of the network. You can use the network immediately after setting up the operating mode by installing the supplied network driver.



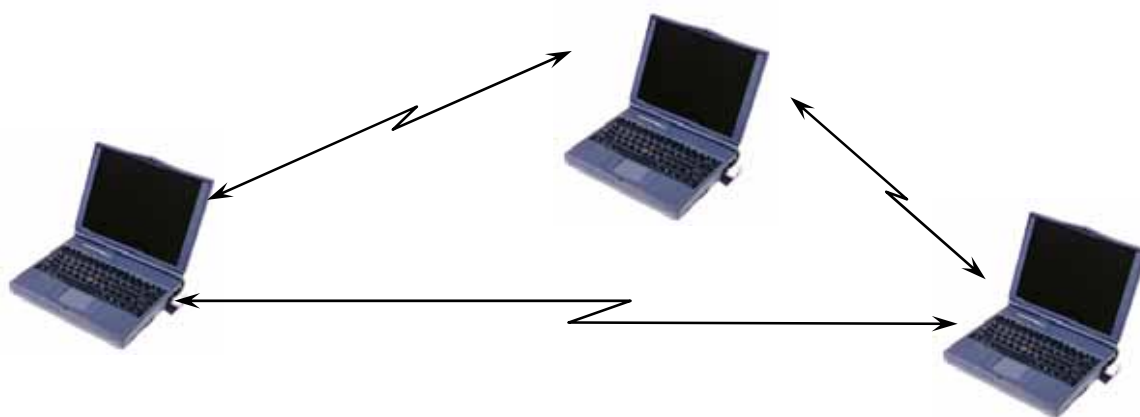

### • Infrastructure Network

Infrastructure Network is architecture that provides communication between wireless clients and wired network resources. An Access Point (AP) and the associated wireless clients define the transition of data. So a wireless client can access all the services that are available for a regular wired LAN by using an AP.

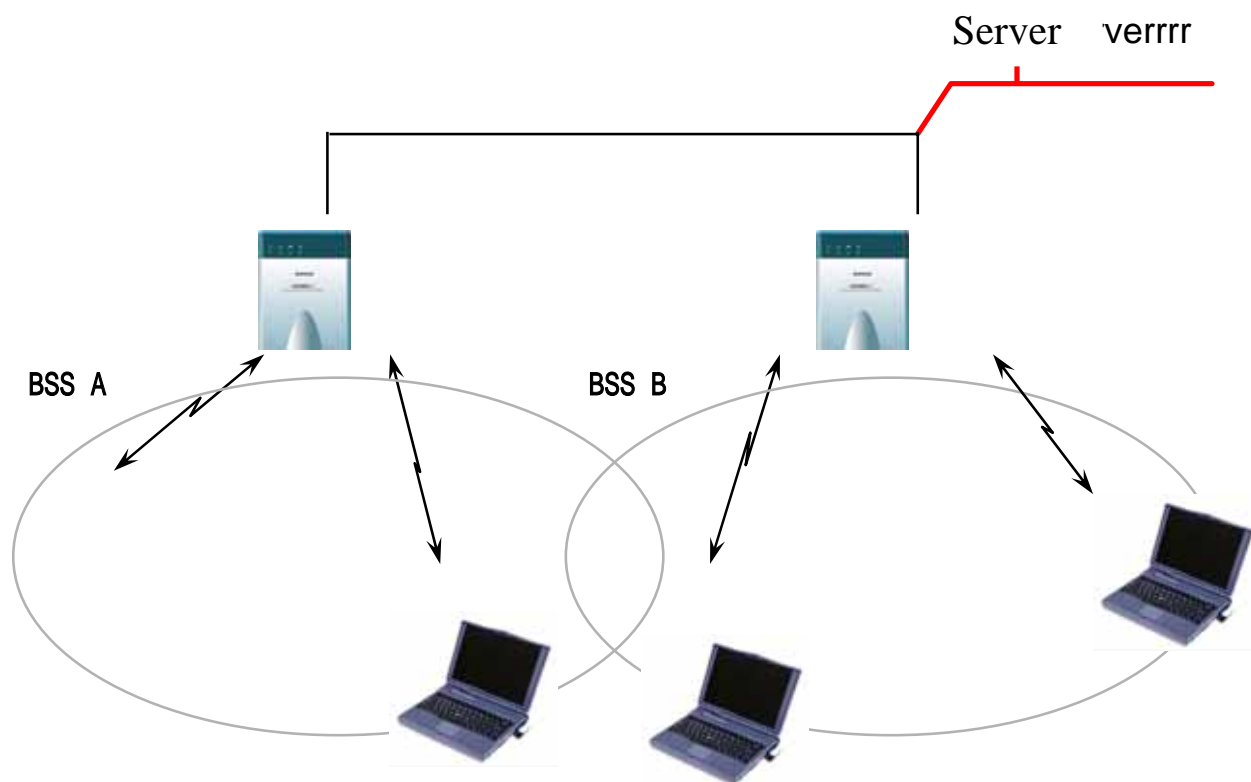

### • Roaming

Roaming is a service that allows wireless clients to use the network in motion by

automatically changing the connection from an old Access Point to a new Access Point when the clients enter in a new cell. During roaming the clients may observe the loose connection or delay in accessing the resources of the network.

- **Scanning, Beaconing & ESS ID**

When a wireless client is initialized, it is necessary for it to find and communicate with the correct group of wireless devices, including AP. At this point, it may search for all the frequency channels and this process is called *scanning*.

There may be multiple APs and networks operating at the same time. It may be necessary to ensure that the station joins with the correct network during the scanning process. To achieve this, each AP is assigned to be part of a logical group called the Extended Service Set (ESS). The name of this logical group is the ESS ID. When roaming is operating, there may be several Access Points as part of the same ESS.

After the power on, wireless clients will listen on its default frequency channel. It will be listening for *beacons* sent by another wireless station or AP. Beacon is a short message containing the ESS ID that will be broadcast roughly ten times a second. When the wireless station hears a beacon and the ESS ID in the beacon matches its own, the client knows that it is on the correct channel and can communicate with its group. If no beacons are seen, or if the ESS ID does not match, the wireless client may move to the next frequency channel and repeat this listening procedure.

In case of direct sequence spread spectrum (DSSS) physical layer, this scanning process occurs at start up and may also occur when the client roams between APs.

## **1.3 MagicLAN Overview**

- The MagicLAN [SWL-2300U\(USB Adapter\)](#) are wireless LAN adapter that provide wireless connection between computers.
- The MagicLAN is designed to operate with IEEE 802.11 (wireless LAN International Standard) wireless compliant radio cards and uses a CSMA/CA (Collision Sense Multiple Access with Collision Avoidance) algorithm as the media access scheme, which makes high speed communication (with minimal collision probability) possible.
- The MagicLAN supports DSSS (Direct Sequence Spread Spectrum) physical layer. This is a radio technique, which scrambles the data prior to transmission and uses a correlation technique on receiver to improve the signal to noise ratio and makes it possible to

communicate in the office having a wall and a compartment.

- The function of the MagicLAN Access Point is to transfer information from a wired LAN to a wireless LAN and vice versa. When operating, the MagicLAN AP is invisible to most users (Normally, unless the user is an administrator, the MagicLAN AP cannot be seen or accessed by users on the network).
- The [SWL-2300U](#) both for Laptop PC and Desktop PC is small and portable as a roaming function is provided for users who need network services while maintaining mobility.
- The MagicLAN supports various network software. The network driver is provided to support network software such as, Windows 98SE, ME, Windows 2000, Windows XP.
- To get further information of Samsung MagicLAN WLAN Card, please visit our website at <http://www.magiclan.com> to download the respective drivers.

## **2. Before the Installation**

The following section will assist you in installing your WLAN Adapter successfully. You will install the MagicLAN Card and software (driver & utility), and finally set the network properties to accommodate resource sharing and select the type of wireless network that you wish to install. The MagicLAN can easily be installed and used, without bothering to connect cables for keeping your computer to use network resources, as in case of a wired LAN.

### **2.1 What is in Your Package?**

Please check the contents of the box to make sure everything is included and ready for use. Here is the list of what you should have in your package:

- [SWL-2300U\(USB Adapter\)](#)
- Samsung MagicLAN Installation CD

### **2.2 System Requirement**

- Operating System: Windows 98SE, Windows ME, Windows 2000, Windows XP
- Laptop Computer with a CD-ROM drive.
- Laptop Computer that have a [USB slot](#) and available [USB interface](#).

### **2.3 Preparations For Installation**

You have to prepare Installation CD which is provided by manufacturer.

You can just install [SWL-2300U](#) Adapters to use Ad-hoc network.

You need to install Access Point(AP) to use Infrastructure network.(Refer to the AP Manual about the installation method of AP)

You may need the original CD of (Windows 98SE, Windows ME, Windows 2000, Windows XP) to set network environment.

### 3. MagicLAN Installation For Windows 98SE/ME/2000/XP

We will explain the installation method for [SWL-2300U\(USB Adapter\)](#) .

#### 3.1 Installation Overview

Here are some steps you will perform in establishing your wireless network connection:


1. Install the Access Point at first. AP is needed in case of Infrastructure network mode.
2. You should install the Wireless LAN Card ([SWL-2300U](#)).
3. Install the software using the Installation CD.
4. Install the network protocol(s) required to communicate on your network. Most likely you will need the TCP/IP protocol.

#### 3.2 Installation Procedure of Windows 98SE

Please follow the following steps one by one to install the [USB Adapter](#) successfully.

##### < Method 1 - Inserting card first >

1. Insert the [USB Adapter](#) into the [USB slot](#) of your computer.
2. **Add New Hardware Wizard** appears and the system looks for “[USB Device](#)”. Press **NEXT** button and check if **Search for the best driver for your device(recommended)** is selected and then press **NEXT** button . Insert the MagicLAN Installation CD into the CD-ROM drive.

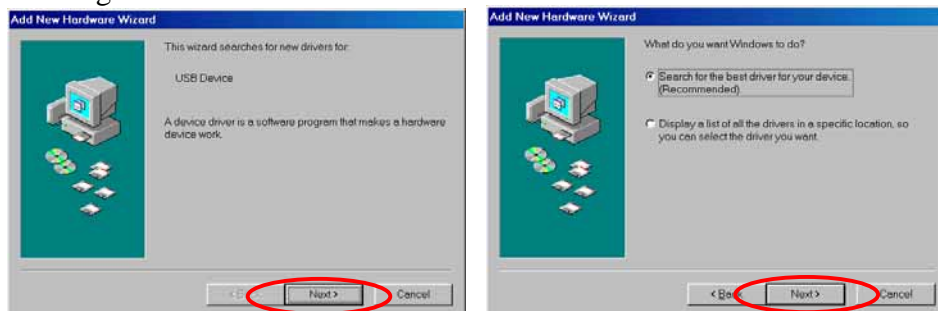

3. Mark the **Specify a location** tab and type “**E:\Drivers**” right below in this tap(Where E is the CD-drive of your PC).



Then press **NEXT** button.




You can find the “**SAMSUNG USB Boot Device**”. Then press **NEXT** button.



After you install Boot Device, press **Finish** button.




**Add New Hardware Wizard** appears and the system looks for “**USB Device**”. Press **NEXT** button.

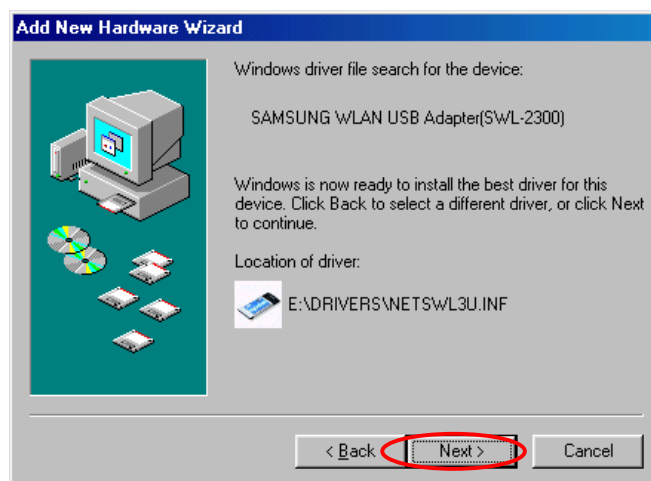


You can find the “**SAMSUNG WLAN USB Adapter(SWL-2300)**” and now it is ready to install our software.

4. Press **NEXT** and system will copy driver files. You may require Windows 98 CD.

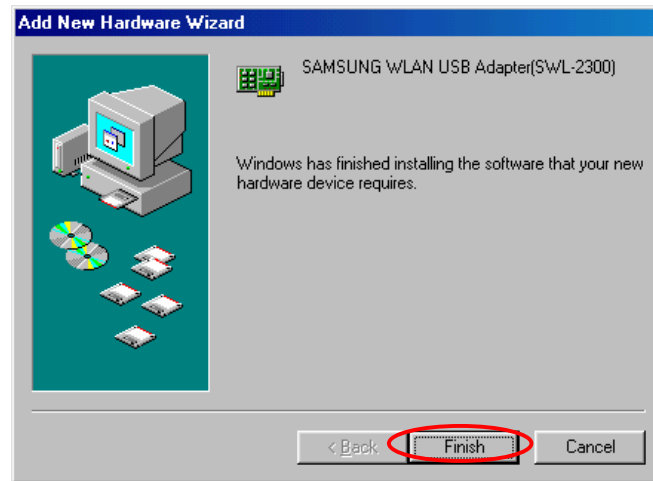


Now driver files are fully installed to start the Wireless LAN Card's operation.

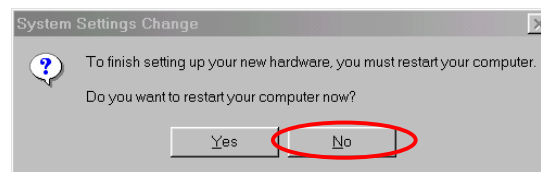


If screen message **Do you want to restart your Computer now** will pop up, select **No**.

5. Right click on the **My Computer** using the mouse and click **Properties**.
6. Check for the **SAMSUNG WLAN USB Adapter(SWL-2300)** by clicking on the **Device Manager**. If you find the **Yellow** sign on the adapter, it shows the installation is not successful. Select the Adapter and click on **Remove**. Restart your computer after uninstalling the driver. (*See the Adapter Removal in section 3.7*)




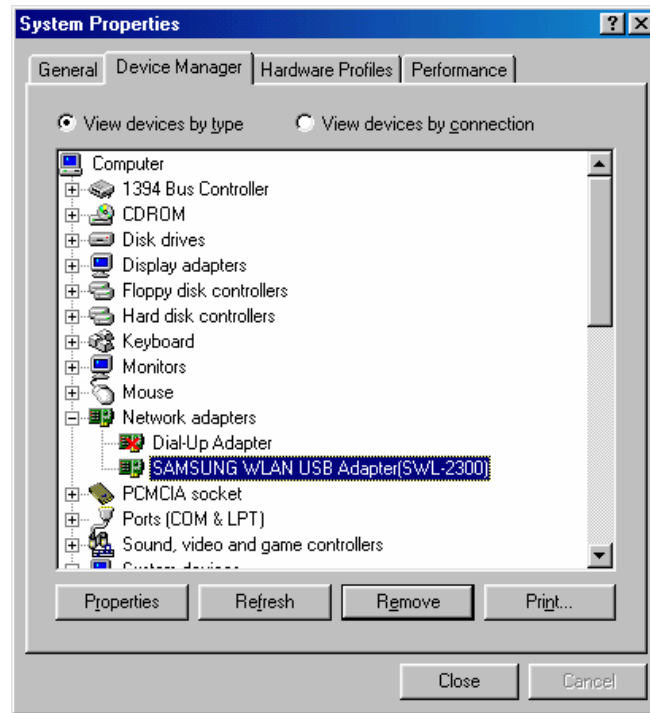


7. Right click on the **Network Neighborhood** using the mouse. Select **Properties** from the pop up menu. The network box appears and you see three main tabs: *Configuration*, *Identification* and *Access Control*.
8. Click on the configuration tab and then click on the add button. Select Network Component Type box appears. Click on the **Protocol** then click the **Add** button.

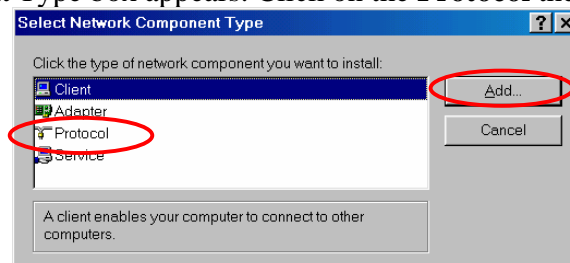


9. Select Network Protocols box appears. From the list of manufactures, click on Microsoft. From the list of network protocols list, select **IPX/SPX** and **TCP/IP**, then click **OK**.( If you want, you can install the **NetBEUI** protocol.)

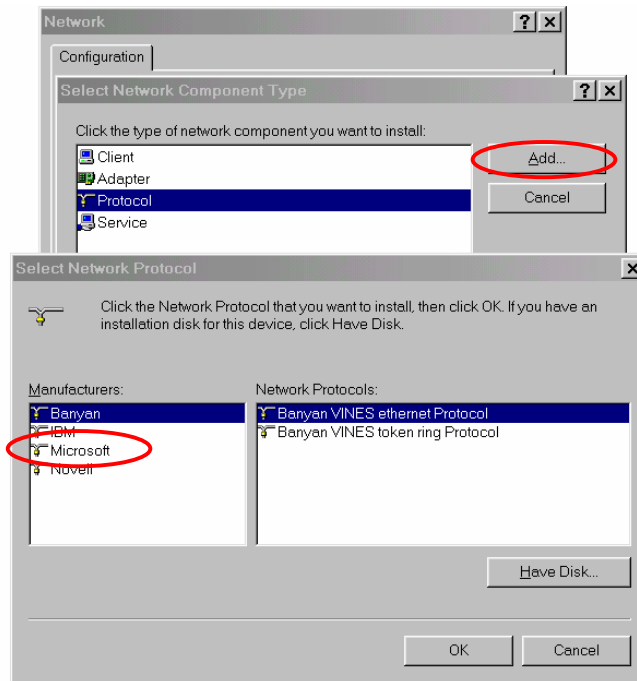


10. Select the **TCP/IP-> SAMSUNG WLAN USB Adapter(SWL-2300)** option for setting the **IP** address value, Gateway value and DNS value of your computer. After setting these parameters appropriately, click **OK** to return to Network Component Type.

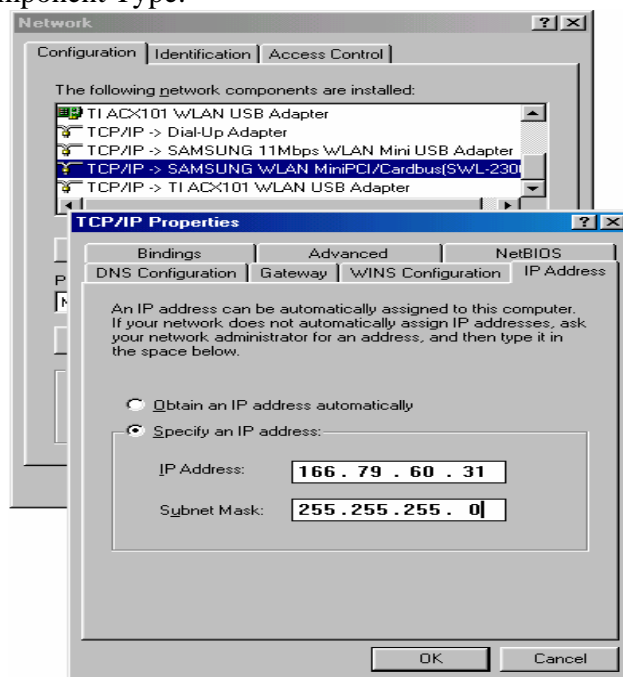

11. you can select the **File and Printer Sharing** options as well as the access to your computer by other users connected to that network by setting the appropriate options.

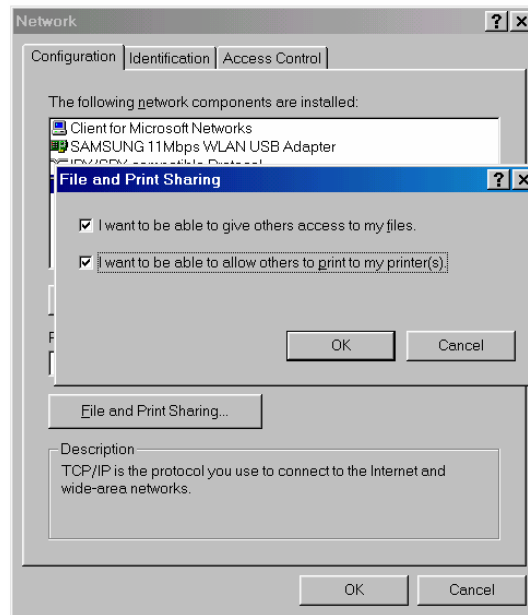

12. Screen message **‘Do you want to restart your computer now?’** will pop up. Select **Yes**. It will shut down your computer and will restart.

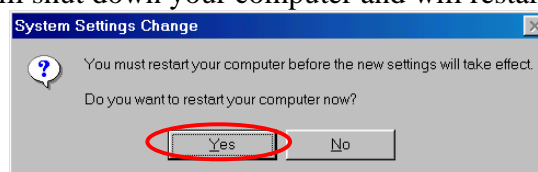

13. After booting the computer, you have to draw out and re-insert the MagicLAN Installation CD to be automatically installed. You can click **‘Install Configuration Utility’** to install our utility. Choose the appropriate language when a context box appeared to choose utility’s language.



14. You can set up Wireless LAN environment by our utility program provided. Refer to **‘Chapter 4’** in this manual.

## < Method 2 – Installing software first >

1. If you insert the MagicLAN Installation CD into the CD-ROM drive, software will launch automatically. Then, click on the '**Install MagicLAN Driver**'.



2. You can see the pictures of Wireless LAN Cards by model name.([SWL-2300U USB Adapter](#)). Click on the model name to install it's driver.



3. Click on Operating System in the right screen in which you want to install driver.



4. After installing driver, insert card.

5. The other procedures are same to 5~14 of < **Method 1 - Inserting card first** >.

Cf.) *The third method* :

You can combine '**Method 1**' with '**Method 2**'. In other words, **after inserting card** into the computer, you can install driver and utility by **using the installshield** instead, not by the inf file. In case of Windows 2000 and Windows XP, system will recognize the card automatically during installation .


Notice that if you install a card after removing it in a Device Manager, you have to mark the check box("Do you want to scan for hardware changes?"). The function is same to the "Refresh" in the Device Manager.

### **3.3 Installation Procedure of Windows ME**

Please follow the following steps one by one to install the **USB Adapter** successfully.

#### **< Method 1 - Inserting card first >**

1. Insert the **USB Adapter** into the **USB** slot of your computer.
2. “**Add New Hardware Wizard**” appeared and the system looks for “**USB Device**”. Check if **Search for the best driver for your device(recommended)** is selected. Insert the MagicLAN Installation CD into the CD-ROM drive.

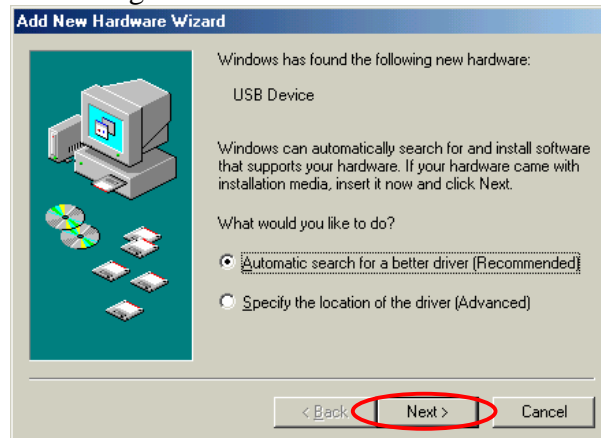

Then press **NEXT** button.


3. You can find the “**SAMSUNG USB Boot Device**”.



After you install Boot Device, press **Finish** button.




**Add New Hardware Wizard** appears and the system looks for “**USB Device**”.

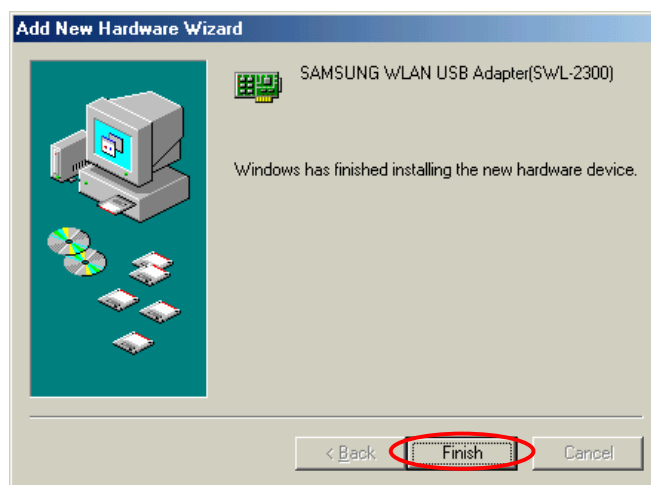


You can find the “**SAMSUNG WLAN USB Adapter(SWL-2300)** ”. And the system will copy driver files. You may require Windows ME CD. You can click **Yes** in the “Digital Signature Not Found” Message box.

Now driver files are fully installed to start the Wireless LAN Card’s operation. If screen message ‘**Do you want to restart your Computer now?**’ will pop up, select **No**.

4. Right click on the **My Computer** using the mouse and click property.
5. Check for the **SAMSUNG WLAN USB Adapter(SWL-2300)** by clicking on the **Device Manager**. If you find the **Yellow** sign on the adapter, it shows the installation is not successful. Select the Adapter and click on **Remove**. Restart your computer after uninstalling the driver. (See the Adapter Removal in section 3.7)

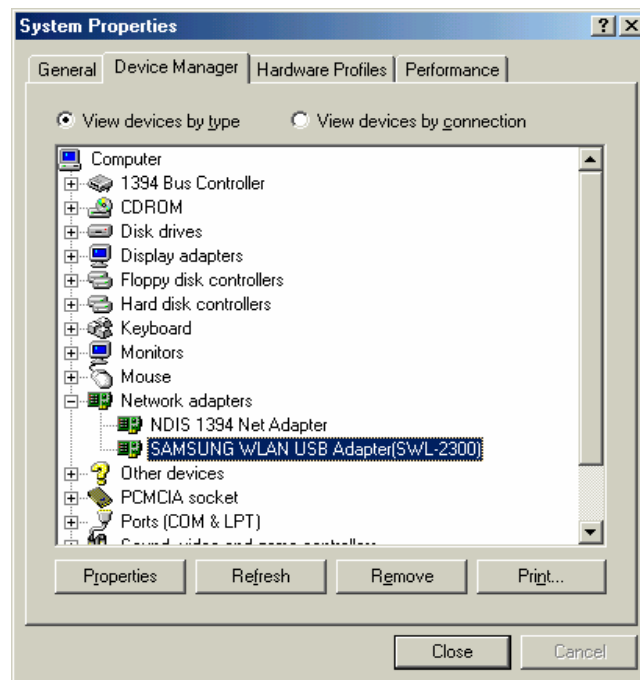


6. Right click on the **Network Neighborhood** using the mouse. Select **Properties** from the pop up menu. The network box appears and you see three main tabs: *Configuration*, *Identification* and *Access Control*.
7. Click on the configuration tab and then click on the add button. Select Network Component Type box appears. Click on the **Protocol** then click the **Add** button.

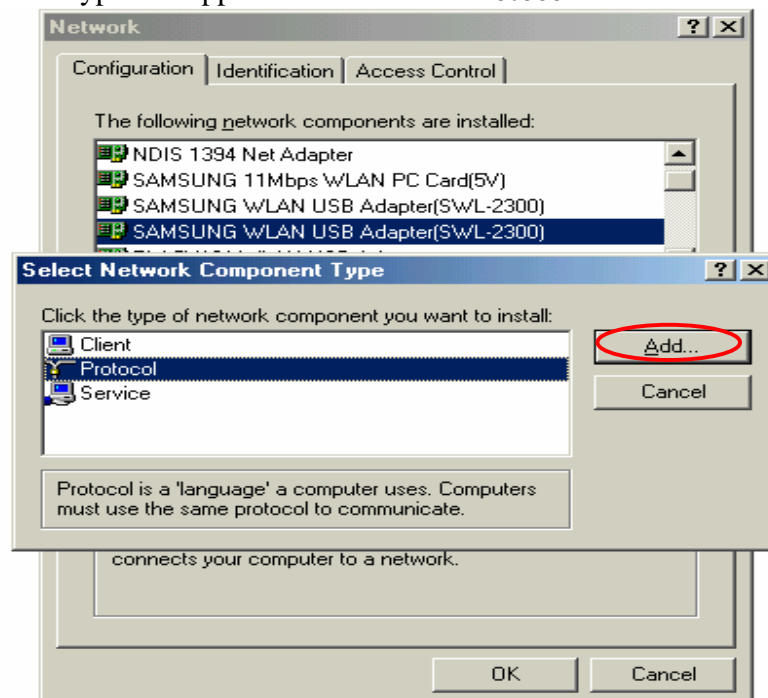


8. Select Network Protocols box appears. From the list of manufactures, click on Microsoft. From the list of network protocols list, select **IPX/SPX** and **TCP/IP**,




then click **OK**. (If you want, you can install the **NetBEUI** protocol.)

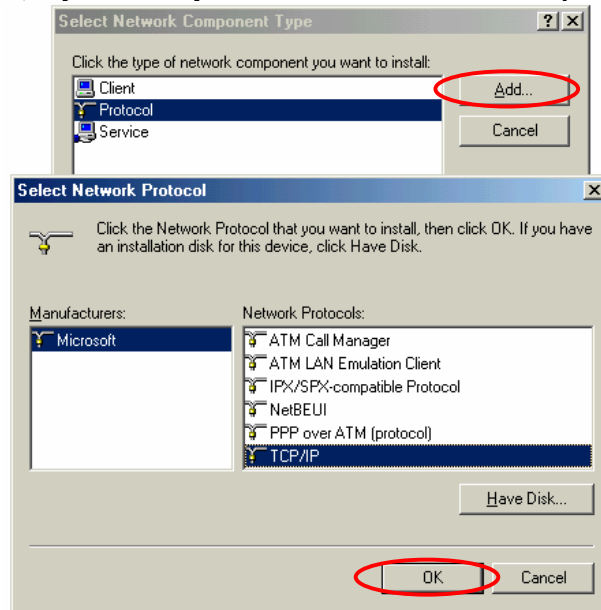

9. Select the **TCP/IP-> SAMSUNG WLAN USB Adapter(SWL-2300)** option for setting the **IP** address value, gateway value and DNS value of your computer. After setting these parameters appropriately, click **OK** to return to Network Component Type.

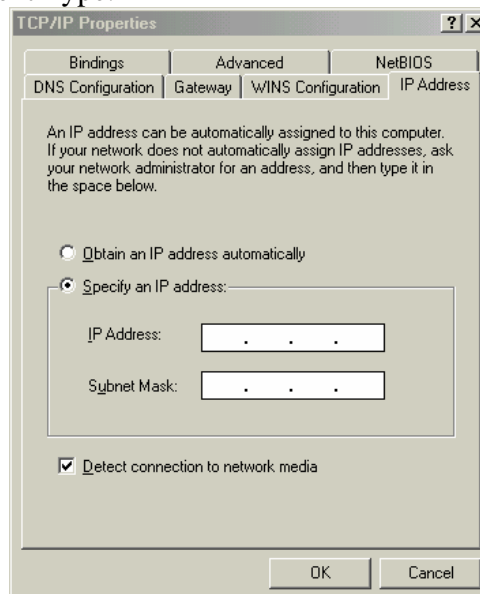

10. you can select the **File and Printer Sharing** options as well as the access to your computer by other users connected to that network by setting the appropriate options.

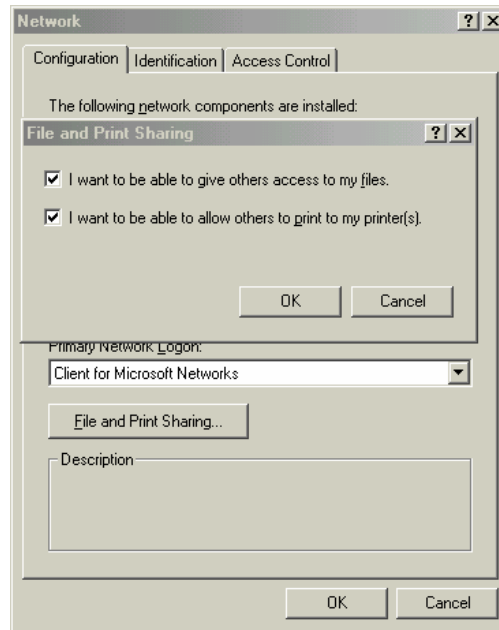

11. Screen message **'Do you want to restart your Computer now?'** will pop up. Select **Yes**. It will shut down your computer and will restart.
12. After booting the computer, you have to draw out and re-insert the MagicLAN Installation CD to be automatically installed. You can click **"Install Configuration Utility"** to install our utility. Choose the appropriate language when a context box appeared to choose utility's language.



13. You can set up Wireless LAN environment by our utility program provided. Refer to **'Chapter 4'** in this manual.

### < Method 2 – Installing software first >

1. If you insert the MagicLAN Installation CD into the CD-ROM drive, software will launch automatically. Then, click on the **'Install MagicLAN Driver'**.



2. You can see the pictures of Wireless LAN Cards by model name.([SWL-2300U USB Adapter](#)). Click on the model name to install it's driver.



3. Click on Operating System in the right screen in which you want to install driver.



4. After installing driver, insert card. You can click **Yes** in the “Digital Signature Not Found” Message box

5. The other procedures are same to 4~13 of < **Method 1 - Inserting card first** >

Cf.) *The third method* :

You can combine '**Method 1**' with '**Method 2**'. In other words, **after inserting card** into the computer, you can install driver and utility by **using the installshield** instead, not by the inf file. In case of Windows 2000 and Windows XP, system will recognize the card automatically during installation .


Notice that if you install a card after removing it in a Device Manager, you have to mark the check box("Do you want to scan for hardware changes?"). The function is same to the "Refresh" in the Device Manager.

### 3.4 Installation Procedure of Windows 2000


Please follow the following steps one by one to install the [USB Adapter](#) successfully.

#### < Method 1 - Inserting card first >


1. Insert the [USB Adapter](#) into [USB slot](#) of your computer.
2. **Found New Hardware Wizard** appeared and the system looks for “Network Controller”. Press **NEXT** button and check if “Search for the best driver for your device(recommended)” is selected and then press **NEXT** button. Insert the MagicLAN Installation CD into the CD-ROM drive. You can ignore the MagicLAN Utility’s screen of the CD-ROM..

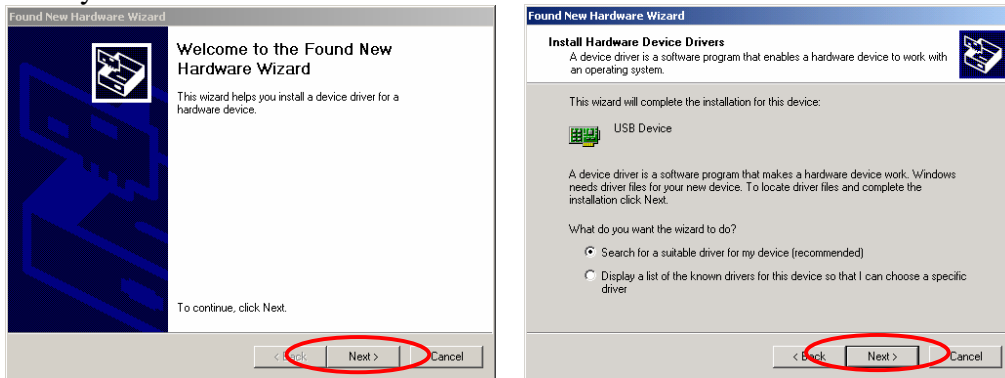

3. Insert the [USB Adapter](#) into [USB slot](#) of your computer.

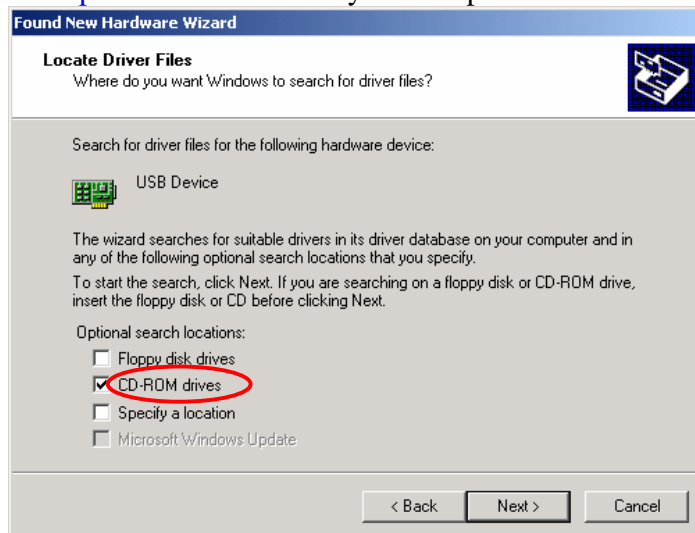


You can find the INF file and now it is ready to install our software.

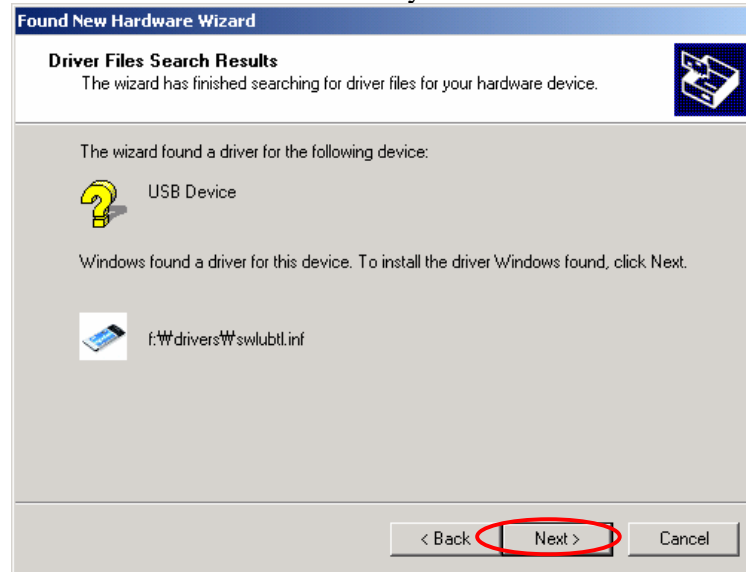

4. Press **NEXT** and system will copy driver files.




5. After you install USB Boot Device, Press **Finish**.

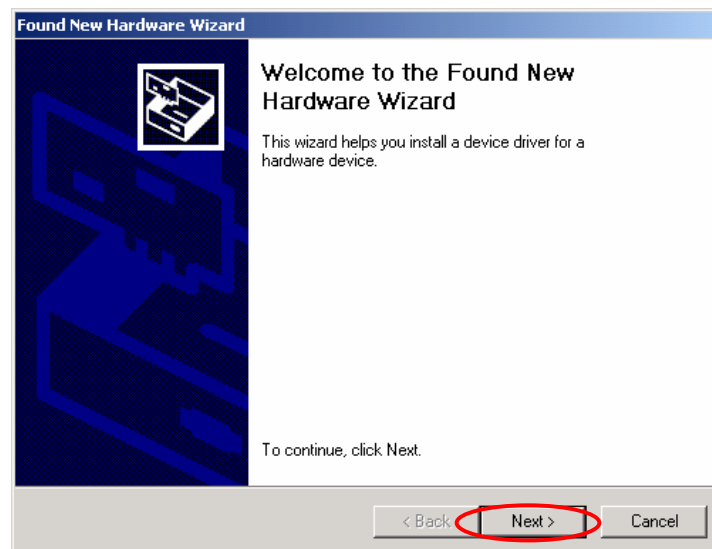


**Add New Hardware Wizard** appears and the system looks for “USB Device”. Press **NEXT** button.

6. You can find the INF file and now it is ready to install our software.

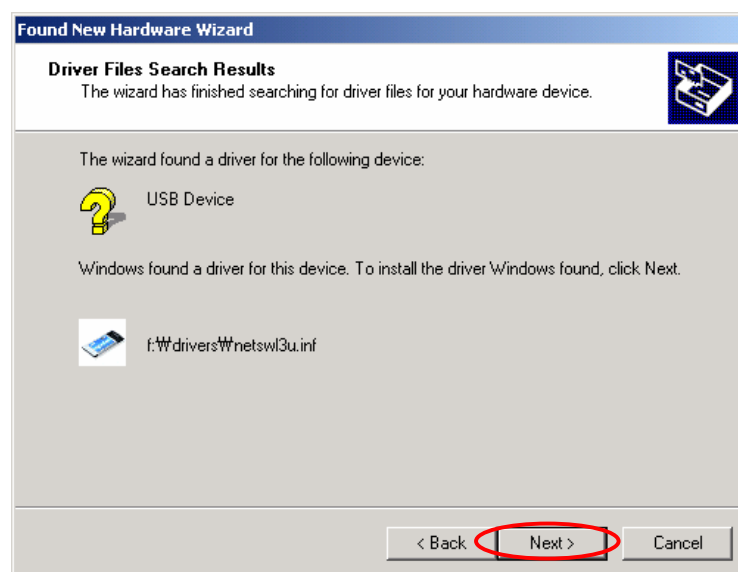


Press the **Next** button.

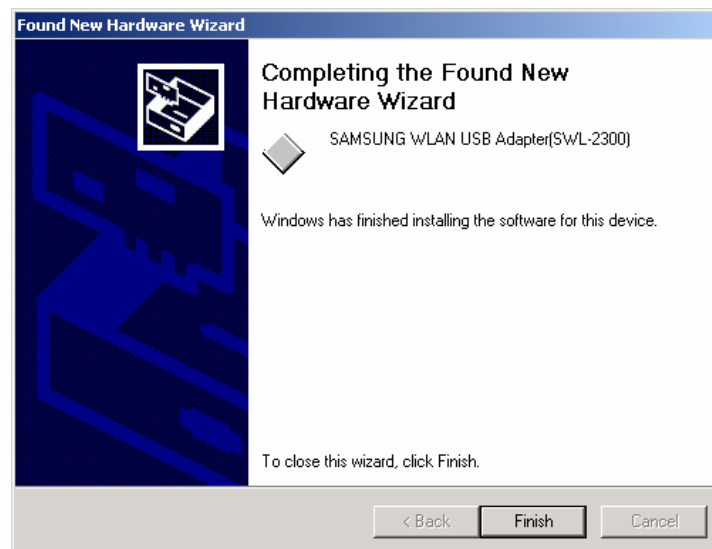


7. You can find the “[SAMSUNG WLAN USB Adapter\(SWL-2300\)](#)”. You can click **Yes** in the “Digital Signature Not Found” Message box. Now driver files are fully installed to start the Wireless LAN Card’s operation.

8. Check for the [SAMSUNG WLAN USB Adapter\(SWL-2300\)](#) on the Device Manager of a **Computer Management** in the Administrative Tools . If you find the **Yellow** sign on the adapter, it shows the installation is not successful. In this case, select the adapter and click on **Remove**. Restart your computer after uninstalling the driver to make the changes effective. (*See the Adapter Removal in section 3.7*)

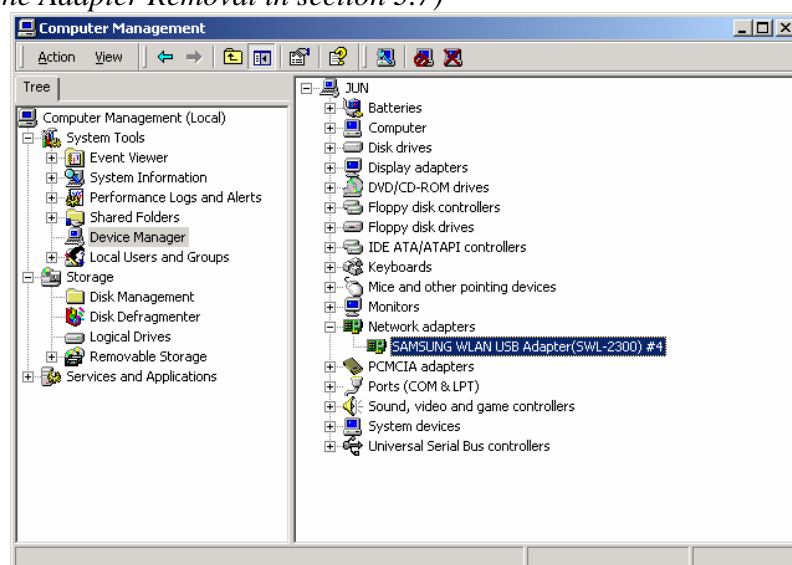

6. Right click on the **Network Places** using the mouse and double-click on the **Local Area Connection** ,and then click on **Properties**.



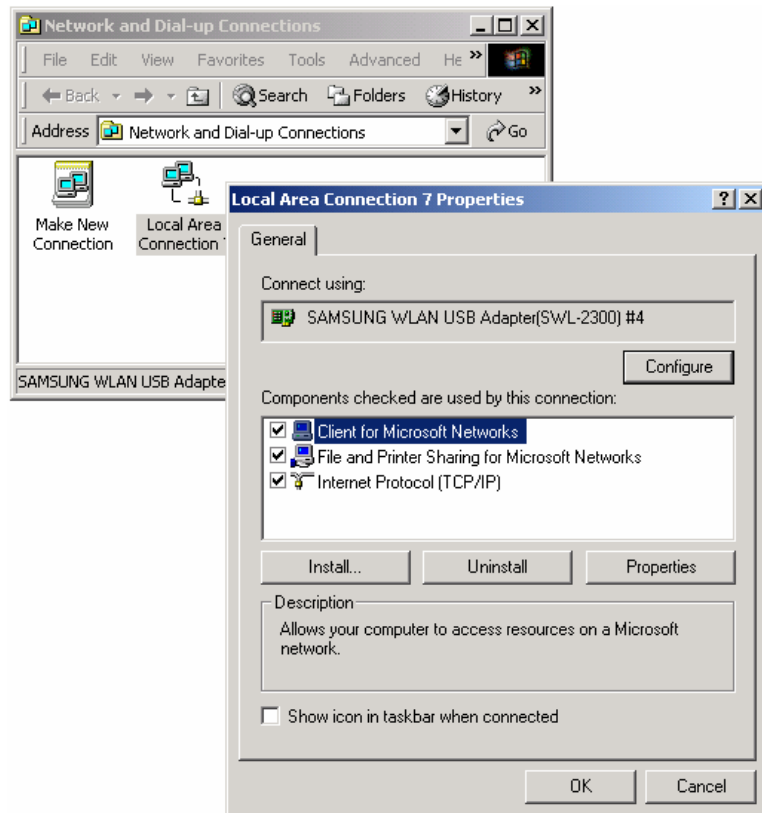

7. Click on the **TCP/IP** option for setting the **IP** address for your computer. Set the **IP** value, **Gateway** value, **DNS** value. After setting these parameters appropriately, click **OK** to return to Network Component Type.
8. You can select the **File and Printer Sharing for Microsoft Networks** options to allow the **Access** to your computer by other users connected to that network by setting the computer sharing options. Click on **OK**.
9. After booting the computer, you have to draw out and re-insert the MagicLAN Installation CD to be automatically installed. You can click **Install Configuration Utility** to install our utility. Choose the appropriate language when a context box appeared to choose utility's language.



10. You should reboot the computer to use our utility properly in the NT-based OSs(Windows 2000, XP).
11. After rebooting your computer, you can set up Wireless LAN environment by our utility program provided. Refer to '**Chapter 4**' in this manual.

### < Method 2 – Installing software first >

1. If you insert the MagicLAN Installation CD into the CD-ROM drive, software will launch automatically. Then, click on the '**Install MagicLAN Driver**'.



2. You can see the pictures of Wireless LAN Cards by model name.(SWL-2300U USB Adapter). Click on the model name to install it's driver.



3. Click on Operating System in the right screen in which you want to install driver.



4. After installing driver, insert card.
5. System recognize the card and you can click **Yes** in the “Digital Signature Not Found” Message box.
6. The other procedures are same to 5~11 of < **Method 1 - Inserting card first** >

**Cf.) The third method :**

You can combine ‘**Method 1**’ with ‘**Method 2**’. In other words, **after inserting card** into the computer, you can install driver and utility by **using the installshield** instead, not by the inf file. In case of Windows 2000 and Windows XP, system will recognize the card automatically during installation .

Notice that if you install a card after removing it in a Device Manager, you have to mark the check box(“Do you want to scan for hardware changes?”). The function is same to the “Refresh” in ther Device Manager.

### 3.6 Installation Procedure of Windows XP


Please follow the following steps one by one in order to install the **USB Adapter** successfully.

#### < Method 1 - Inserting card first >

1. Insert the **USB Adapter** into **USB slot** of your computer.
2. “**Found New Hardware Wizard**” appeared and the system looks for “**USB Device**”. Insert the MagicLAN Installation CD into the CD-ROM Drive.



3. When following window is popped, Press “Continue Anyway” button.

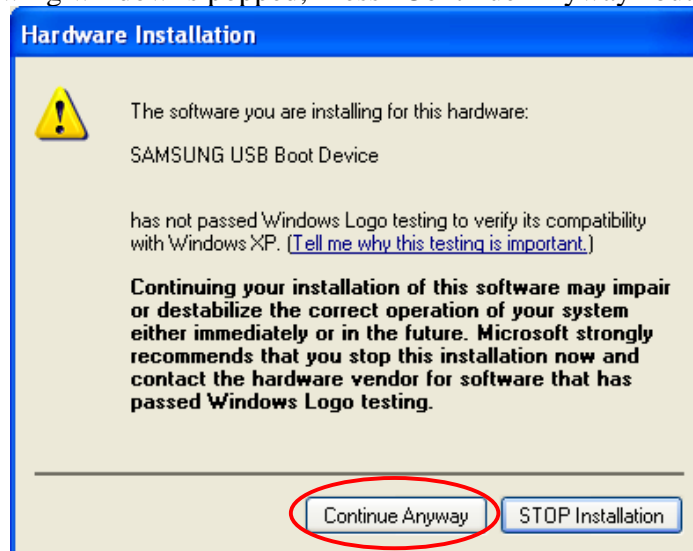

4. You can find the “**SAMSUNG USB Boot Device**” and system will copy boot driver files.



5. “Found New Hardware Wizard” appears and the system looks for “USB Device”.



6. You can find the “SAMSUNG WLAN USB Adapter(SWL-2300)” and system will copy driver files.


7. You can click **Continue Anyway** in the 'Hardware Installation' Message box.




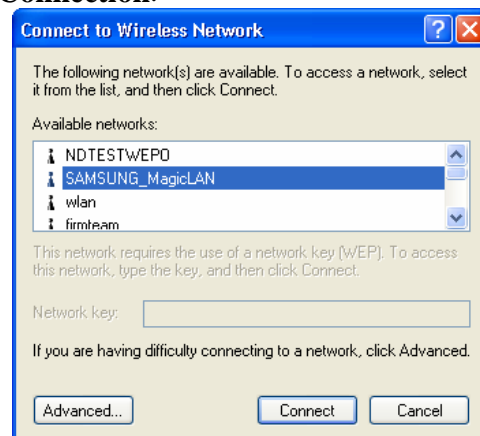
8. Now driver files are fully installed to start the Wireless LAN Card's operation.




9. Check for the **SAMSUNG WLAN USB Adapter(SWL-2300)** on **Computer Management** in the **Administrative Tools** of the **Control Panel**. If you find the **Yellow** sign on the adapter, it shows the installation is not successful. In this case, select the adapter and click on **Remove**. Restart your computer after uninstalling the driver to make the changes effective. (See the *Adapter Removal* in section 3.7)

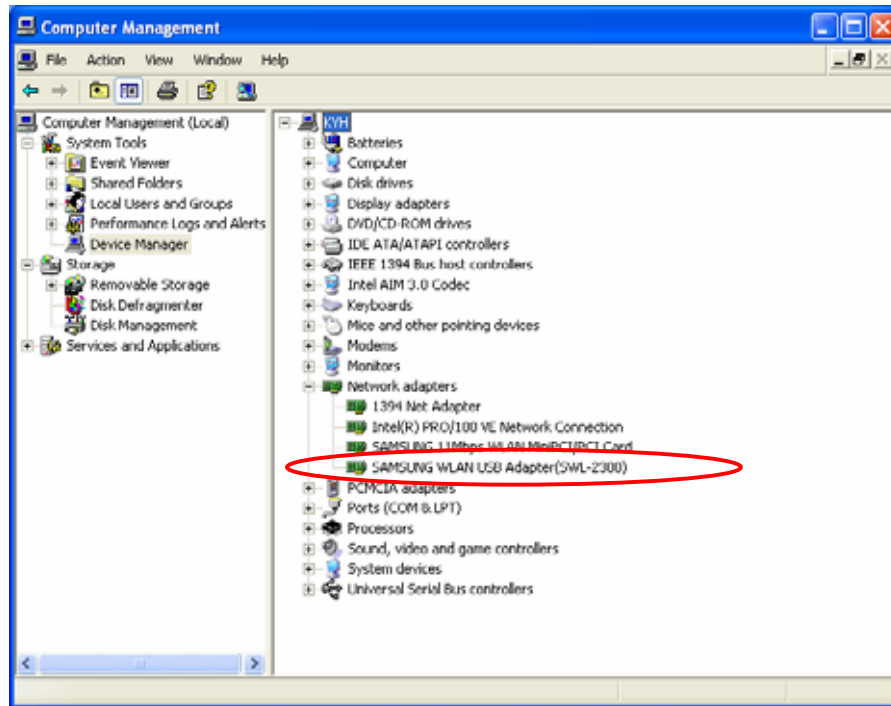

10. Of the icons displayed on the right bottom of desktop, click on icon  stated **Wireless Network Connection**.




11. When you are using DHCP, just select the AP that you want to connect in the **Connect to Wireless Network** above.
12. To manually set your IP address, WEP and some other configuration, click on **Advanced** of the above picture and then click **Configure Available networks** on the **Wireless Networks** Tab. Set the SSID and parameters to be needed to modify and then clicking on **OK**. The AP that you selected will be displayed on the **Preferred Networks**.

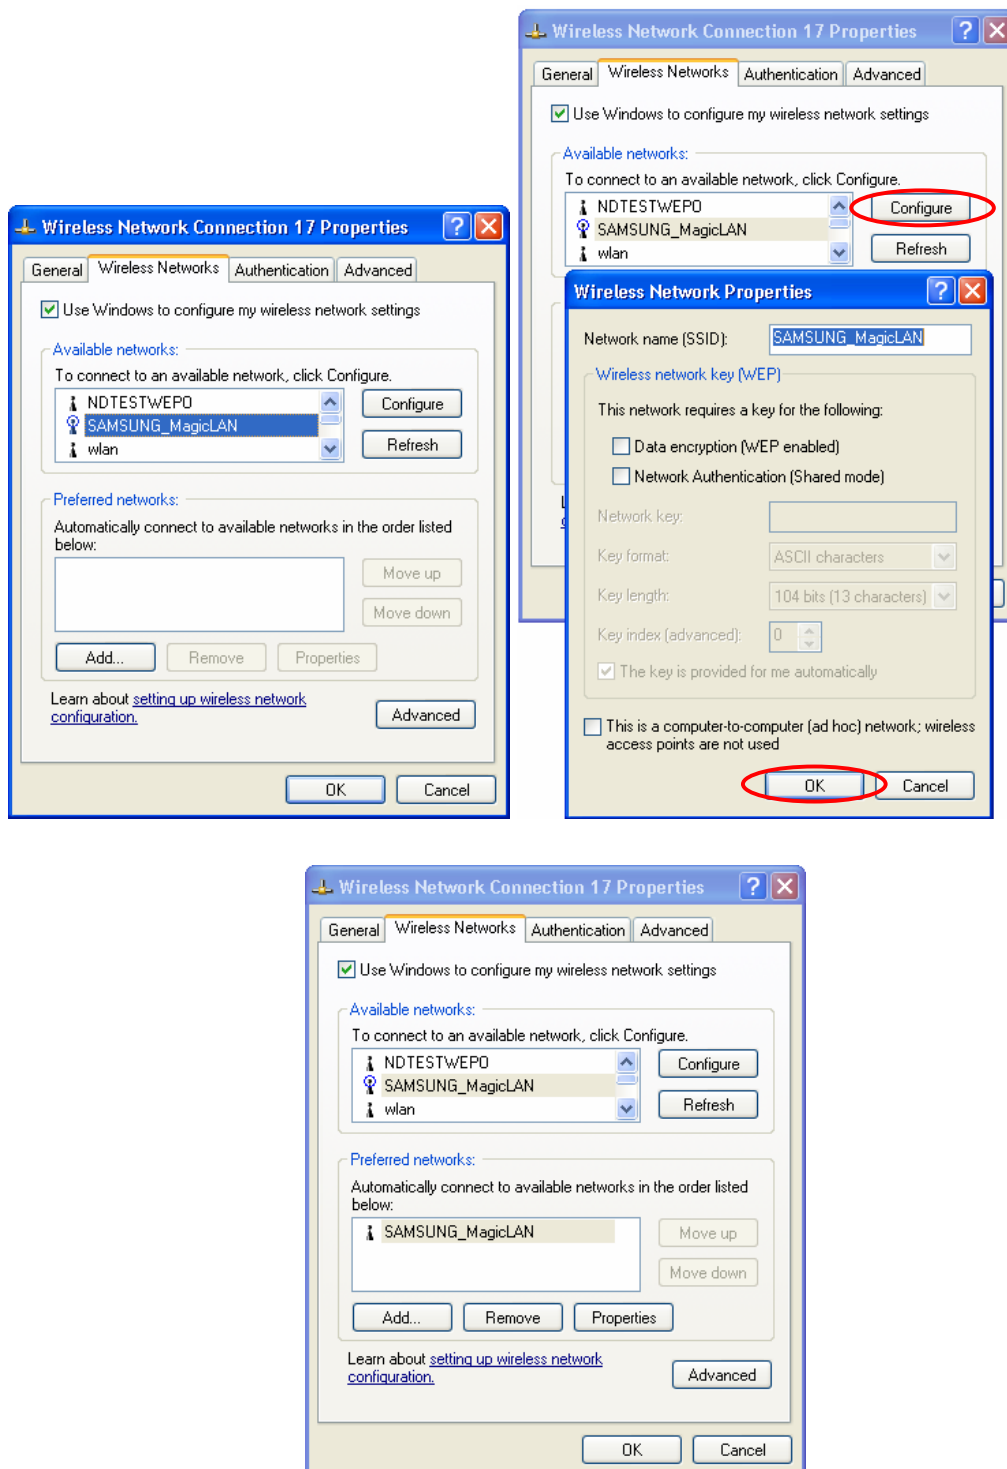

13. Next, move to the **General** Tab. After the double click the “**Internet Protocol(TCP/IP)**”, set the IP value, Gateway value and DNS value and click on OK. All will be done by clicking on **OK** once more.



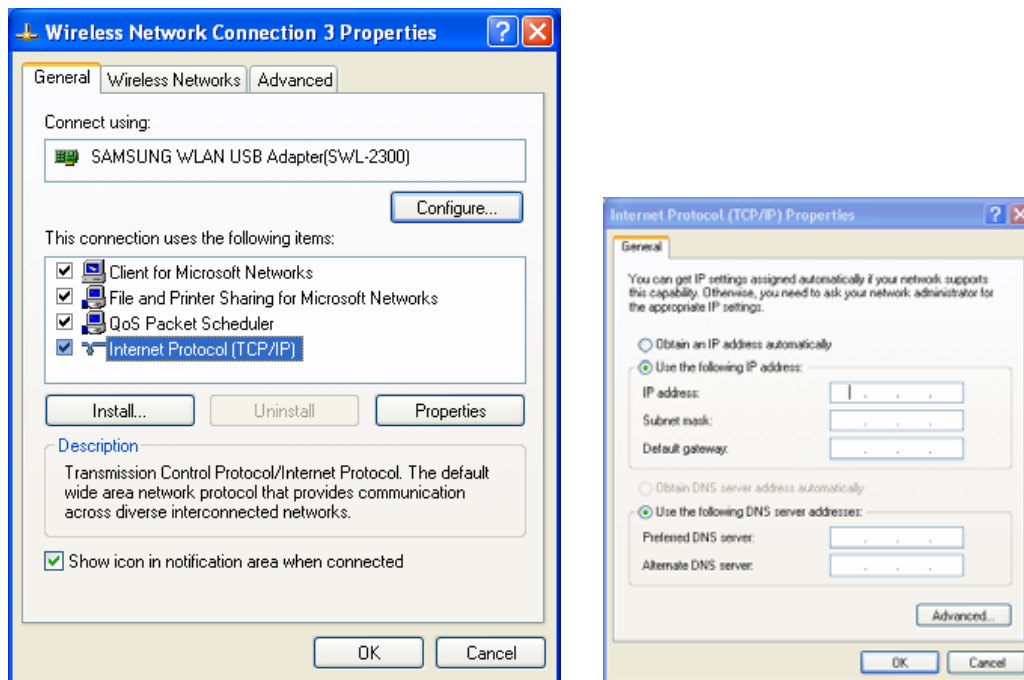

## < Method 2 – Installing software first >

1. If you insert the MagicLAN Installation CD into the CD-ROM drive, software will launch automatically. Then, click on the '**Install MagicLAN Driver**'.



2. You can see the pictures of Wireless LAN Cards by model name.(SWL-2300U USB Adapter). Click on the model name to install it's driver.



3. Click on Operating System in the right screen in which you want to install driver.



4. After installing driver, insert Wireless LAN card. You can click **Continue Anyway** in the “‘Hardware Installation’ Message box.

5. The system recognizes the Wireless LAN Card. If **Found New Hardware Wizard** appears, just click **Next** to install the driver files.

6. The other procedures are the same to 5~9 of **< Method 1 - Inserting card first >**.

*Cf.) The third method :*

You can combine ‘**Method 1**’ with ‘**Method 2**’. In other words, **after inserting card** into the computer, you can install driver and utility by **using the installshield** instead, not by the inf file. In case of Windows 2000 and Windows XP, system will recognize the card automatically during installation.

Notice that if you install a card after removing it in a Device Manager, you have to mark the check box (“Do you want to scan for hardware changes?”). The function is the same to the

“Refresh” in the Device Manager.



### [ Use of Our company's Utility in Windows XP ]

You can also set up the Wireless LAN by the our company's utility program instead of Windows XP' utility program.

After booting the computer, you have to draw out and re-insert the MagicLAN Installation CD to be automatically installed. You can click “**Install Configuration Utility**” to install our utility. Choose the appropriate language when a context box appeared to choose utility's language.




You should reboot the computer to use our utility properly in the NT-based OSs (Windows 2000, Windows XP).

- If you click the icon  on the right bottom of the desktop, you can see the current state of the Wireless LAN.
- Click on **Option** of the **General settings** on the bottom of the Utility and mark “**Manage the Wireless Control by this utility under WinXP**”. For more details, refer to ‘**Chapter 4**’ in this manual.
- If you want to use Wireless LAN Utility  in the system of Windows XP, be sure that the mark of “**Manage the Wireless Control by this utility under WinXP**” of the our company's utility program is removed.

### **3.6 Update of MagicLAN Wireless LAN Card Driver**

1. After inserting the MagicLAN Installation CD, click the Install MagicLAN Driver and select the Card and Operating System that you want to update in.
2. If selection box appears, select 'Reinstall MagicLAN Software' between 'Remove' and 'Reinstall'.

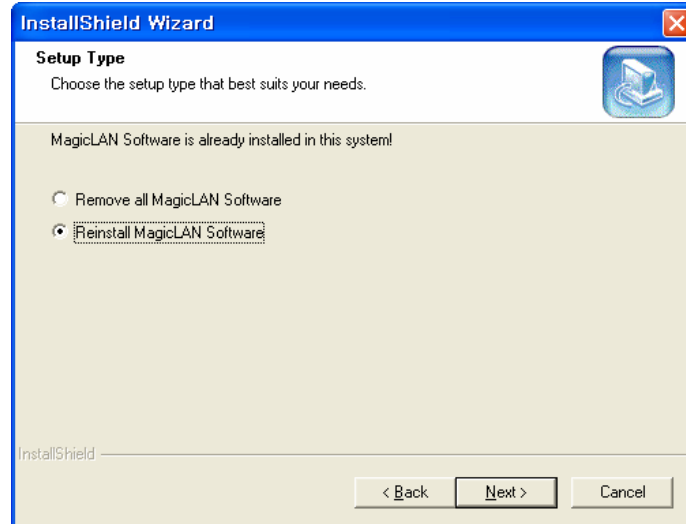

### **3.7 Removal of MagicLAN Wireless LAN Card Driver**


#### **(Adapter Removal)**

Click like followings :




-> **All Programs -> MagicLAN -> MagicLAN Driver -> Remove USB adapter.**

Select 'Remove all MagicLAN Software' and click **Next**.

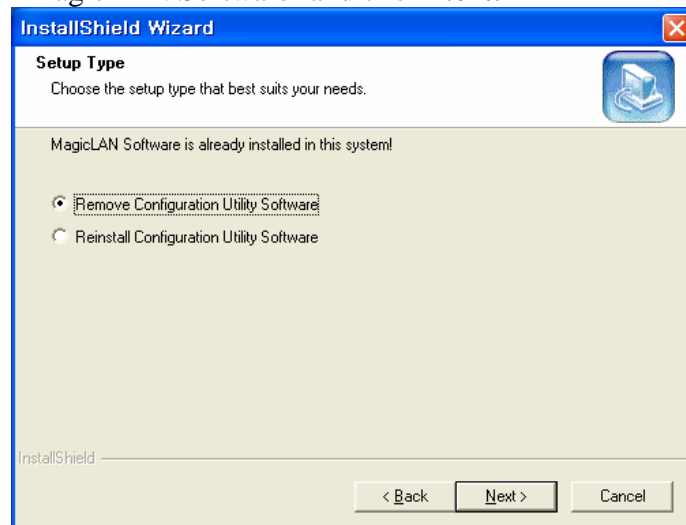



### (Utility Removal)


Click like followings :

 -> **All Programs -> MagicLAN -> MagicLAN Utility -> Remove Utility Uninstall.**

Select 'Remove Configuration Utility Software' and click **Next** .

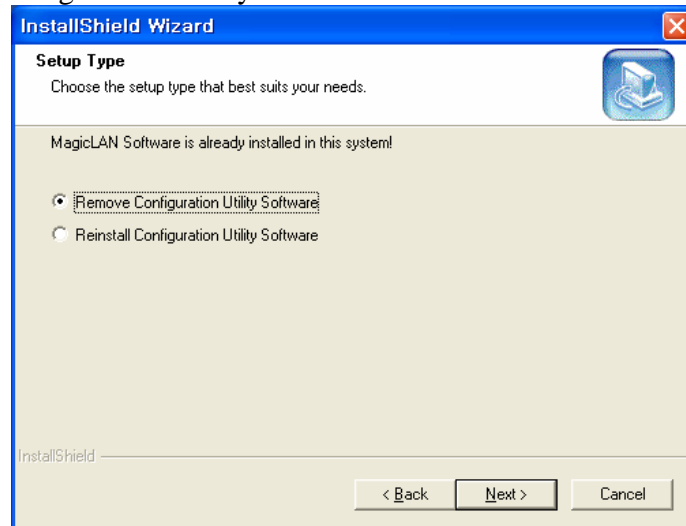

(cf) If you want to just remove the WLAN Card from the PC, click  and **Stop SAMSUNG WLAN USB Adapter(SWL-2300)** icon the right bottom of your computer screen. Then you remove the WLAN Card after clicking the OK button on the message, 'SAMSUNG WLAN USB Adapter(SWL-2300) can now be safely removed from the system'

\*\*  - ' Safely remove hardware' icon (Windows ME , 2000, XP)


## 4. The Program For Setting MagicLAN


### 4.1 The concept of Profile


- TCP/IP settings for the fixed networks/Wired LAN have no problems, as they do not deal with the mobility. But in case of mobile equipments such as WLAN card, when WLAN client has moved from home to Office or vice-versa, the difficulty for using the old TCP/IP settings arises.
- The concept of profile makes it easy to use the same TCP/IP settings for WLAN cards regardless of the movement.
- **Profile** can be selected again with ease if it were saved. Saving the settings for WLAN and TCP/IP as a Profile, it is easy for user to select and use one of the saved profiles, **especially, it can be used quickly without rebooting your computer while the settings for TCP/IP is updated.**

### 4.2 Installation Procedure

First time use of WLAN on your computer needs the following settings.

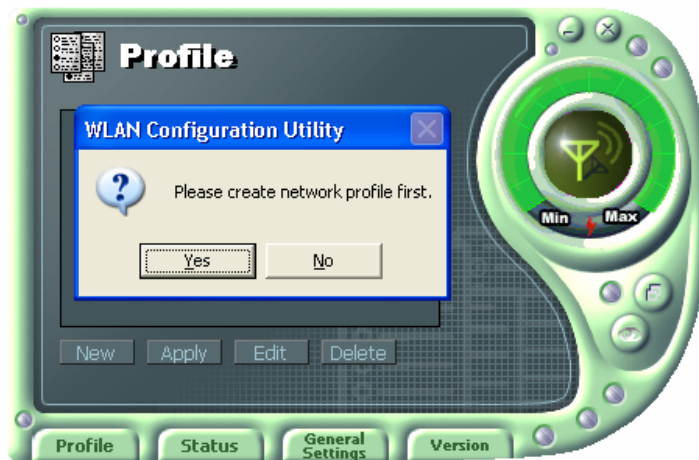

1. Insert your WLAN card. After clicking on the icon , which is found at the right bottom your computer screen, “Please create your first network profile now” window will appear. Click ‘Y’ button for yes and the following window will appear. cf) The above message will not be appeared in the Win XP. Make a Profile with clicking ‘New’ button.

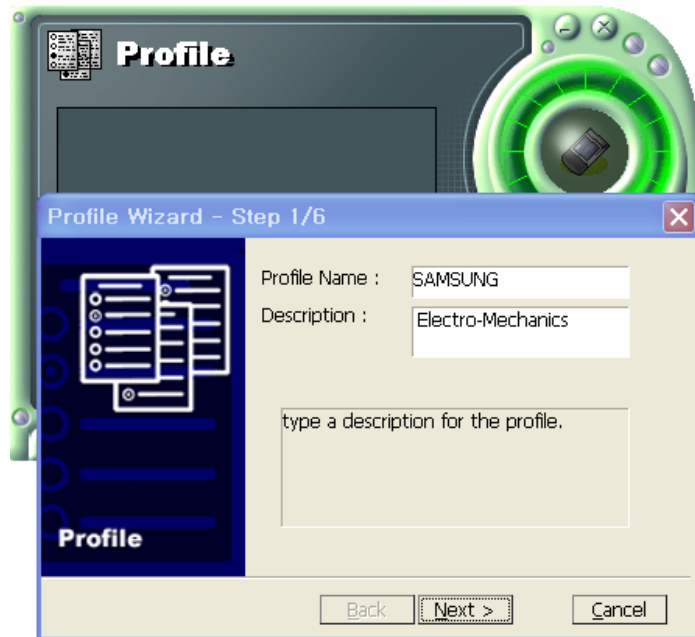


2. Input a profile name in Profile Name and description for your profile name in Description and click the NEXT button, the following window will appear.




3. Select the Operating Mode to use and click the NEXT button. Default operating mode is Infrastructure.

- Infrastructure Network is the structure that the communication between Wired LAN and Wireless LAN is feasible. Wireless client is possible to access to the other Network (include Internet) via Access Point.
- Ad-hoc/802.11Ad-hoc Network support the communication among Wireless clients. Due to the support of communication among Wireless equipment, Ad-hoc Network doesn't need Access Point. (cf. 802.11 ad-hoc is satisfied with the 802.11 specification)

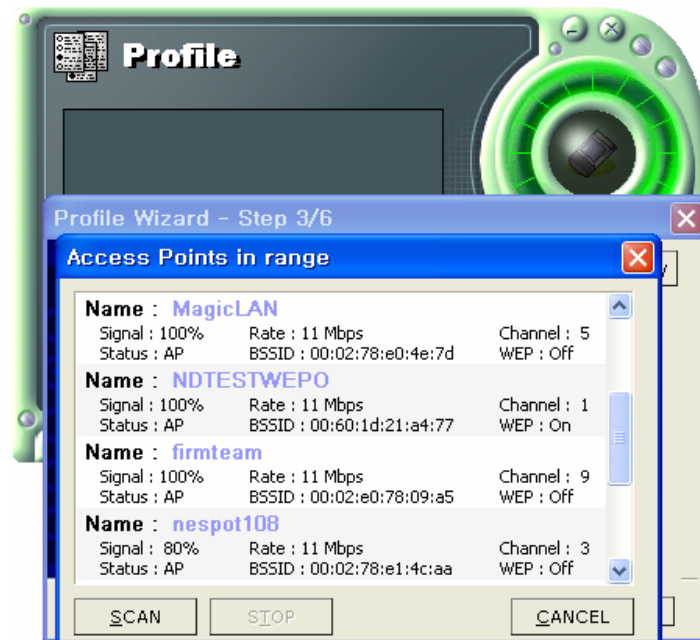

4. If you clicked on the Survey, the above window will appear showing you Access Points or Stations (Ad hoc) that are able to connect now. Select the AP that has the highest signal to use as an SSID.




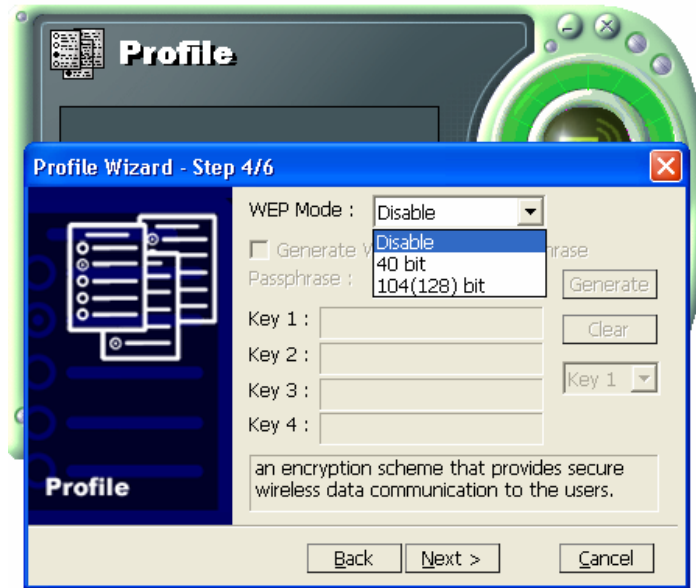

5. Select the WEP Mode and Click the Next button.

- WEP Mode

- This is security tool to protect your DATA from unauthorized users.
- To use the function of WEP, The WEP key settings for client must be same to that of AP in the Infrastructure Mode, and the WEP key settings must be same for all clients in the Ad-hoc/802.11Ad-hoc Mode.

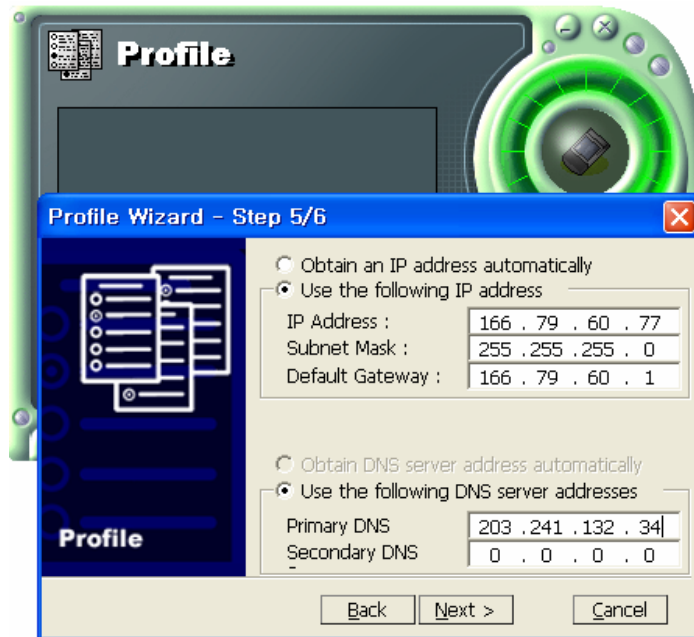

6. Enter a valid IP address. IP address can be allocated automatically. (cf. it is limited to users who use the DHCP server or ADSL connection). As only checked in “Manage TCP/IP together with Profile”, IP address can be controlled in the Profile. This menu does not appear under MS Windows NT. Click NEXT to see the following window.



7. Showing you the settings selected so far. Click the Finish button.

→ Check on this box. It will work on the system after clicking the Finish button.



8. Click the Profile name shown in the above window click the Apply button. The settings will be over. If the IP address entered in the system settings is different than the IP address selected under profile name, system IP settings will be changed without rebooting your system.

## 5. The main configuration of Program

During the installation of your SAMSUNG WLAN Card, configuration utility is also installed. You can see the icon at the right bottom of your screen. Double clicking that icon will show you the screen as shown below.



The following describes the meanings of variables shown in the WLAN configuration.

- **Profile:** The arbitrary designation by user. It is the profile name to distinguish each Profile. So when you set the Profile, you would better choose the name that can send the contents it has.
- **Link Status:** you Link Status shows a client connection state with AP (In Infrastructure mode) or with other clients (In 802.11Ad-hoc Mode).
- **SSID:** It represents the name of a group consisting of WLAN users only. It is also called ESSID.
- **Operating Mode:** There are three Modes. Infrastructure Mode (the connection among clients through an AP), 802.11Ad-hoc/Ad-hoc Mode (direct connection among clients)
- **BSSID:** It shows the Physical Address of WLAN card inserted in AP in the Infrastructure Mode and the Random Generation value in the 802.11 Ad-hoc Mode.
- **Channel:** It shows channel number in use for communication between AP and client or among clients. When the Network Mode is set to the Infrastructure or 802.11Ad-hoc/Ad-hoc Modes, it searches a channel automatically.
- **WEP:** Security tool to be used for encryption/decryption of data to be exchanged between clients or between clients and AP. It denies the authorized access to network if WEP is enabled.
- **Power Saving:** The Power Saving Mode that prolongs the life of battery.

- **Physical Address:** It is the Physical address of WLAN card being used by user. This is also the MAC address of the WLAN card.
- **IP Address:** Address used to send data from one computer to another to create the network of several computers. IP address is unique for every network card installed on a computer to identify it from other computers.
- **Subnet Mask:** It is an address that enables along with an IP Address to share a network Address within the LAN of company.
- **Gateway:** The network point playing a role as a gateway to enter the other network.
- **DNS:** It is the system that transforms the name of an Internet domain to the corresponding IP Address. IP Address is actually needed to locate a computer/server on the Internet.
- **Adapter Name:** It shows the kind of WLAN card that the user is using now.

The following description is the fundamental installation of WLAN Card.

## **5.1Profile**



You can modify your wireless environment four buttons on the bottom of Utility.

### **5.1.1 The 'New' button**

Clicking the New button, you can add or make a new Profile.


(Refer to 'The Program For Setting MagicLAN' in the Chapter 4)

### **5.1.2 The 'Apply' button**


Select and click a Profile to be used, then the saved or modified profile settings will be used for configuring your WLAN card.

### 5.1.3 The 'Edit' button

Clicking the Edit button or the Profile name that was created previously, you can modify that Profile.

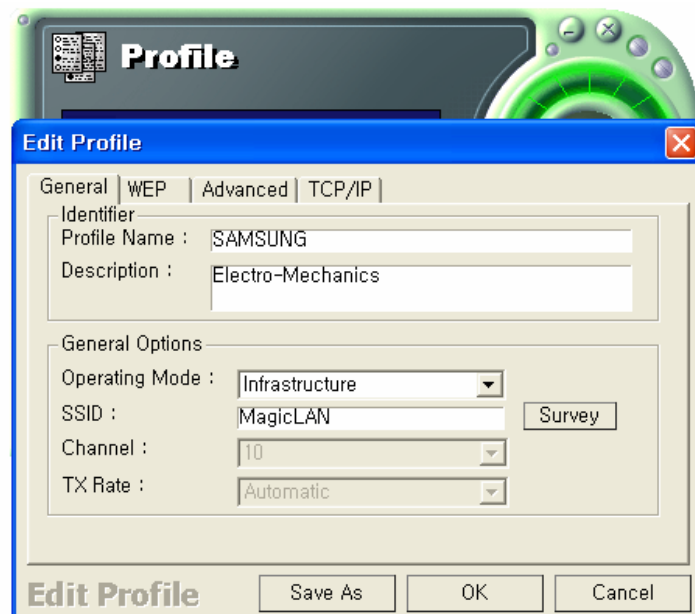


- Click the WEP button to set the security.

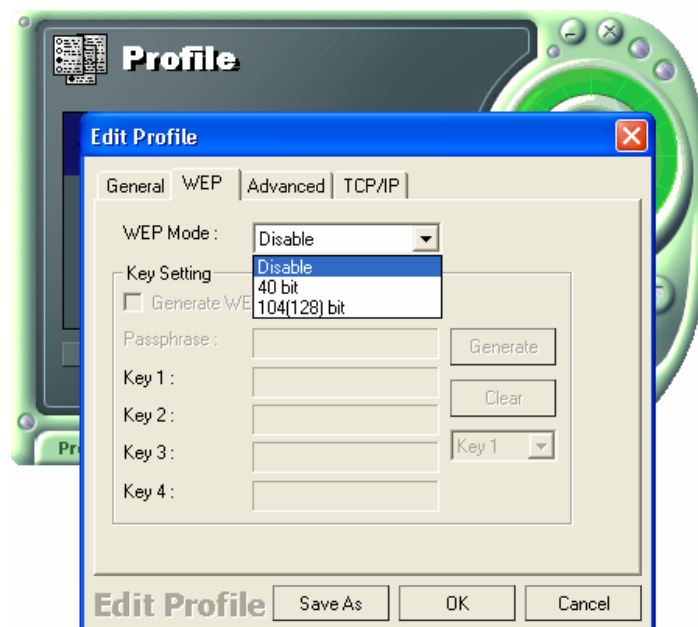


1. First of all, select the '40 bit'.

2. Check a “Generate WEP Key using Passphrase” box and input a certain value (ex. test1 etc) in the ‘Passphrase’ and click the Generate button. Then it will make four values of keys automatically.

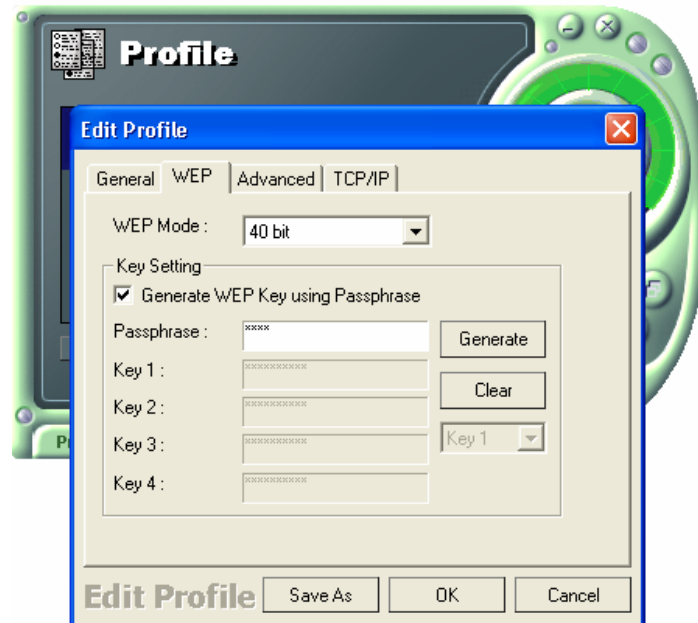

3. Then you set the same value to the WEP of AP. (cf. If you use the WLAN made from other company, you must set the same values in the four keys)

- You can set the ‘Power Saving’ and ‘Threshold’ with clicking the Advanced button.

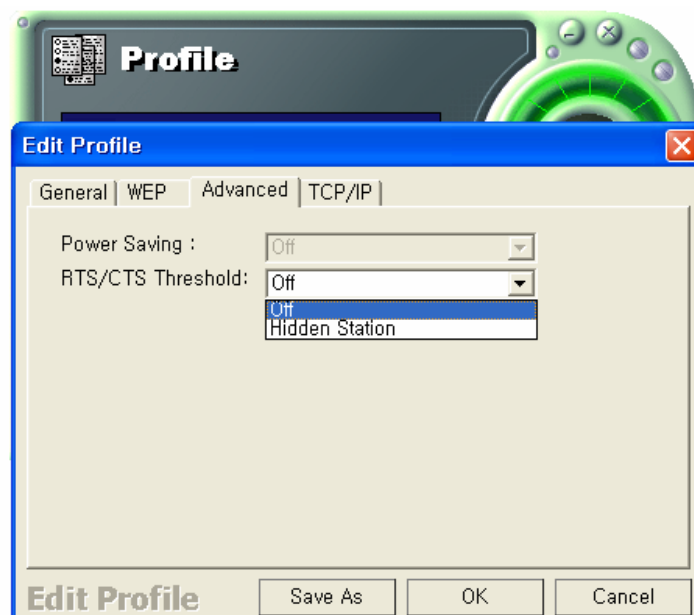


1. Power Saving Mode saves the Battery. (cf.. it can give a lowering of

efficiency according to 802.11 Specification)

2. RTS/CTS Threshold Mode is better used in the place surrounded with much RF interference.

- Click the TCP/IP to input the IP directly or receive IP automatically.

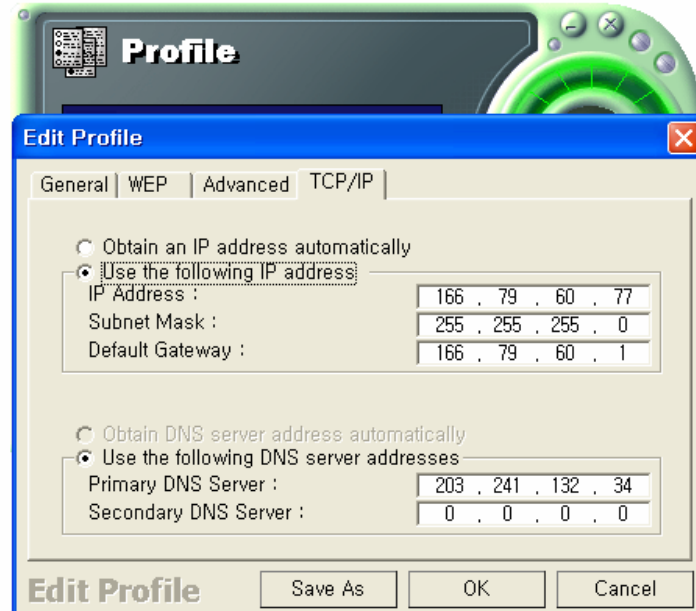

#### 5.1.4 The 'Delete' button

Select a profile and click on Delete button to remove that profile.

## 5.2 Status





### 5.2.1 The 'Current Status' button

It shows the current state of the WLAN card. (Refer to the 'The main configuration of Program')



### 5.2.2 The 'AP Status' button


It shows the current state of AP. (You can see the IP address changed by the Get Status button)



- **Model:** It shows the name of model.
- **Version:** It shows the version of AP.
- **Description:** It is the name of AP designated by AP manager during AP setup.
- **NAT:** It shows whether the private IP address (NAT server) is enabled or not.
- **DHCP:** It shows whether the DHCP sever is enabled or not.
- **Clients number:** It shows the number of users currently connected with the AP.
- **Internet connection:** It is the connection type with outer network (LAN, ADSL, ISDN etc.).
- **IP Address:** It shows whether the IP address is from DHCP server or NAT server.
- **Connected Status:** In case the connection type with the outside network is of ADSL/CABLE type, it shows the connection state between AP and ASP service.
- **IP:** It is the IP address of the AP.

### 5.2.3 The 'Site Survey' button


It finds you the AP/Station that are connected currently. (It takes a few seconds to be done)

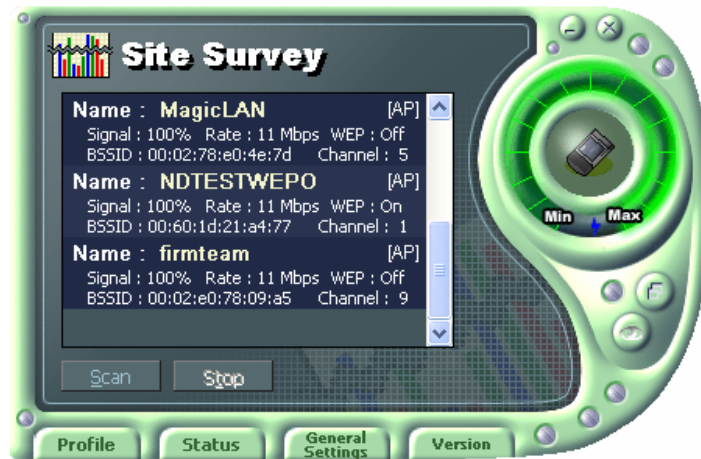

- **Signal:** It shows the connection state of Stations with AP or Master Station.
- **Rate:** It shows the Tx Data rates.
- **WEP:** It shows security state with the AP.
- **BSSID:** It represents the Physical Address of AP in the Infrastructure Mode and the Random Generation value in the 802.11 Ad-hoc Mode.
- **Channel:** It shows the currently used channel number.

## 5.2.4 Statistics

It shows the state of the data transmission. (You can regulate the graph to be see clearly with the settings of the MAX bps on the right side of bottom)

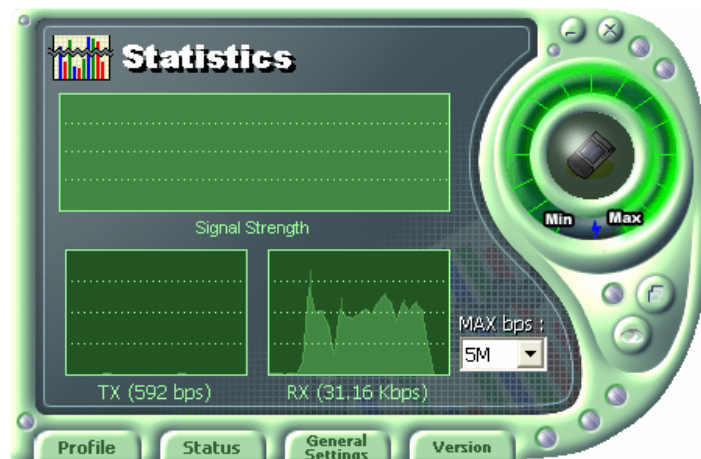

## 5.3 General Settings

### 5.3.1 The 'DHCP' button



- It works when it is enabled.
- The Get Status button shows the updated information obtained from the DHCP server.
- The Release DHCP button releases the IP Address that was received from the DHCP server.
- The Renew DHCP button is for receiving the IP Address from the DHCP server.

### 5.3.2 The 'Options' button



- If you disable the check from the 'Sound Enable', you cannot hear the sound whenever you click.
- If you disable check from the 'Manage TCP/IP together with profiles', you cannot control TCP/IP in the utility. You can just modify TCP/IP in the Network Neighborhood.
- If you check the 'Do not show the Profile Wizard Welcome message', 'Welcome message' does not pop up in case of set or add the Profile.


## 5.4 Version



- You can see the Driver and Firmware version for your WLAN card currently in use.
- Click the Website to get more information about WLAN.

## 6. Troubleshooting

To make the installation of SAMSUNG WLAN Card more users friendly, we have suggested following the installation steps one by one as listed in the section 3 and section 4. Still you encounter some problems while installing the WLAN Card or you want to confirm whether your card is installed properly or not, we have listed the procedure for checking the various components after you have installed the card.

Q. Wireless connection icon shows  in the Task bar and **Wireless connection unavailable** message appeared.

It's because property setting is wrong. Please check these contents.

A1. Check if there's right network name in the **Available networks** in the client PC. Network name should be same in the infrastructure mode(using AP) as well as in the Peer-to-Peer mode. Wireless LAN's network name distinguish a uppercase letter from a lowercase letter.

A2. Check if you are using the same WEP string. And you must use the same WEP key. Please ask network manager about the Access Point's WEP string and key.

A3. Check if you are in the range of the Access Point.

A4. Reinstall the driver using MagicLAN Software CD if driver doesn't work.

Q. Samsung's tray icon in the task bar shows red color .

A. This is same to above question. Please refer to the above A1~A4.

Q. Link Status is excellent, but I can't connect to the network.

If TCP/IP setting is not properly established , you can't connect to the network.

A. Check TCP/IP setting.

When you are using DHCP server, if allocated IP address is insufficient, you can't use network. In a case like this, please ask the network manager.

Q. A system identify the Wireless LAN Card, but I can't connect the network.

If there's many network adapter in the system, wireless LAN may not work properly.

A. Open Device Manager and set **disable** the unused network adapter(PPP adapter ,etc.) by clicking right mouse.

Q. I want to use Samsung client utility in the Windows XP. But, we can't set up correctly.

A. Windows XP provides each configuration utility of LAN and Wireless LAN by OS in

itself. In case of this, you must select the “**Manage the Wireless Control by this utility under WinXP**” in the Option menu of General Settings in the Samsung client utility.

Q. I can't see the TCP/IP informations in the MagicLAN Utility.

A. It's related to a file, IPHLPAI.dll. Please reboot the system.

There maybe some systems that don't show their IP, Subnet Mask, Gateway, DNS, Adapter Name.

Q. When we use IPX/SPX protocol with NETWARE CLIENT, we can't connect to the network game like STARCRAFT and local server.

A. In case of Windows 2000, please click Start – Settings – Control Panel – Network and Dial-up Connections(double click)'. Click a right mouse button on the Local Area Connection menu and select Properties. Then, you need to double-click NWLink IPX/SPX/NetBIOS Compatible Transport Protocol and then change Frame Type **from Auto Detect to Ethernet 802.3**.

In case of Windows 98, please click **Start – Settings – Control Panel – Network**(double click)'. Then, you need to double-click **IPX/SPX-compatible Protocol -> SAMSUNG ...** and then change Frame Type **from Auto to Ethernet 802.3** in the Advanced tap.

Q. After rebooting or waking up from standby, wireless LAN adapter is not recognized and yellow mark is displayed in device manager.

A. Remove USB wireless LAN card from usb slot and re-insert wireless LAN card.

Q. 'USB Device Not Recognized" message is displayed on right below tray bar when you are installing driver.

A. Ignore the message and install the driver continuously.

Q. When you are trying the network connection through NESPOT Oneclick program, the authentication is succeeded but IP address is not assigned.

A. IP address may be not well assigned, if system IP is set into static IP.  
Therefore, try the network connection after changing into DHCP IP.

Please refer to the website: <http://www.magiclan.com/> about other detailed questions.